

Parameters	Configuration	Weight: Steel / Wood	Volume
Overall Dimension(m)/ Area(m ²)	6.0*8.5*2.4*3.3m ² 4.0*5.2*2.2*3.1m ² / 20.8m ²	583kg / 380kg	1.43m ³
	7.0*9.5*2.4*3.4m ² / 5.0*6.0*2.2*3.1m ² / 30m ²	685kg / 450kg	1.91m ³
Interior Area(M)/ Area(m ²)	7.0*12.5*2.4*3.4m ² 5.0*9.0*2.2*3.1m ² / 45m ²	900kg / 680kg	2.49m ³
Wooden Carton Dimension	410*70*60cm / 420*70*80cm / 420*70*90cm		

Outer Tent Parameters



750g PVC Blackout Fabric
Waterproof Pressure (420000 mm)
UV Protection: UPF 50+
Flame Retardant: B1
Tear Resistance: Warp 2510N / Weft 2055N
Mildew Resistant、Self-Cleaning

Inner Tent Parameters

430g TC Cotton
Waterproof Pressure (1000 mm)
UV Protection: UPF 50+
Tear Resistance: Warp 1900N / Weft 1230N
Mosquito-Resistant / Breathable

Frame Parameters


Main Tube: Imported Anti-Corrosion Wood (Φ80mm)
Connection Tube: Φ89mmDip Galvanized Steel Pipe、Φ3.0mm Thickness
Main Tube: Φ60mm Galvanized Steel Pipe、Φ2.0mm Thickness
Connection Tube: Φ70mm Galvanized Steel Pipe、Φ4.0mm Thickness
TIG Welding (Tungsten Inert Gas Welding)
Outdoor Specialized Baking Paint Treatment (Resistant To Sun Exposure And Rain)

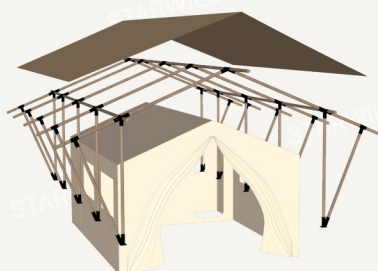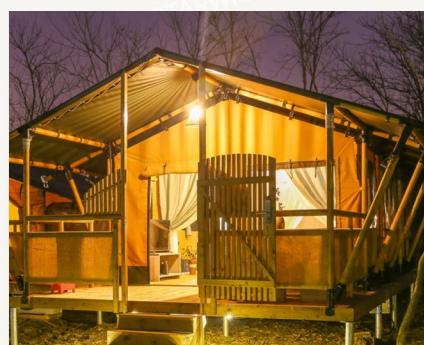

(3D Render-Exploded View)



(3D Render-Assembly View)

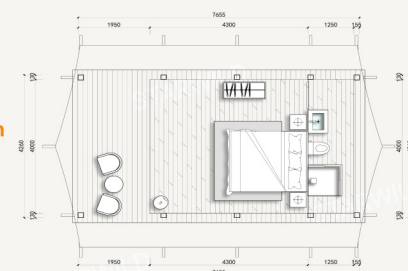

(Floor Plan)

INTERIOR SPACE DIAGRAM



OPTIONAL ACCESSORIES

