



Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²)	6.0*9.0*2.0*3.5 / 54m ² 3.8*2.3*2.0*3.5 / 8.8m ² (Foyer)	900kg	4.95m ³
InteriorDimension(m) /Area(m ²)	4.0*8.6*2.3 *3.3 m / 34.4.m ²	900kg	4.95m ³
Wooden Carton Dimension	450*110*100cm		
Outer Tent Parameters	750g PVC Blackout Fabric Waterproof Pressure (420000 mm) UV Protection: UPF 50+ Flame Retardant: B1 Tear Resistance: Warp 2258N / Weft 2042N Mildew Resistant、 Self-Cleaning	900g PVC Blackout Fabric Waterproof Pressure (19600 mm) UV Protection: UPF 40+ Flame Retardant: B1 Tear Resistance: Warp 3612N / Weft 2339N Mildew Resistant、 Self-Cleaning	
Inner Tent Parameters	430g TC Cotton Waterproof Pressure (1000 mm) UV Protection: UPF 50+ Tear Resistance: Warp 1916N / Weft 1352N Mosquito-Resistant/ Breathable		
Frame Parameters	Main Tube: Φ60mm Hot-Dip Galvanized Steel Pipe, 2.0mm Thickness Connection Tube: Φ70mm Hot-Dip Galvanized Steel Pipe, 4.0mmThickness TIG Welding (Tungsten Inert Gas Welding) Outdoor-Specific Baking Paint Finish (Resistant To Sunlight And Rain)		



(3D Render-Assembly View)

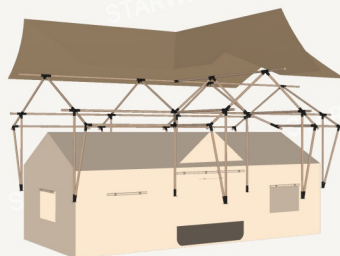


(3D Render-Exploded View)

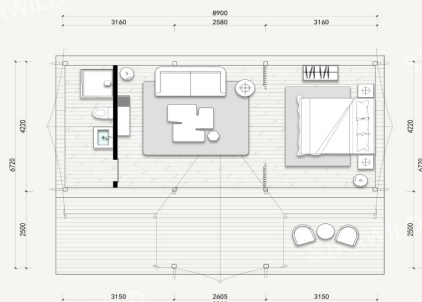

(Floor Plan)

INTERIOR SPACE DIAGRAM



Partition Curtain (Optional)



Connection Tube




Mosquito Netting




Moisture-Proof Ground Sheet

OPTIONAL ACCESSORIES




Decking System




Bathroom System



Interior System



Door/Window System



Curtain System



Insulation System