



| Parameters                                      | Configuration                            | Weight |
|-------------------------------------------------|------------------------------------------|--------|
| Overall Dimension(m)/<br>Area(m <sup>2</sup> )  | 5.0*8.0*2.3*3.9m / 40m <sup>2</sup>      | 819kg  |
| Interior Dimension(m)/<br>Area(m <sup>2</sup> ) | 4.85*5.35*2.2*3.15m / 25.9m <sup>2</sup> |        |
| Volume                                          | 2.8m <sup>3</sup>                        |        |
| Wooden Carton<br>Dimension                      | 490*78*100cm<br>240*36*156cm             |        |

#### Outer Tent Parameters

900g PVDF Architectural Membrane Fabric  
Waterproof Pressure (19600 mm)  
UV Protection (UPF40+)  
Flame Retardancy: B2  
Tear Resistance: Warp 3612N/Weft 2339N  
Mildew-Proof And Self-Cleaning

#### Inner Tent Parameters

430g TC Environmentally Friendly  
Technological Cotton  
Waterproof Pressure (1000 mm)  
UV Protection (UPF50+)  
Tear Resistance: Warp 1916N / Weft 1352N  
Insect-Proof And Breathable

#### Frame Parameters


Main Pipe: 80\*80mm Galvanized Steel Pipe,2.0mm Thickness  
Argon Arc Welded, Hot-Dip Galvanized Corrosion-Resistant Galvanized Steel Plate  
Outdoor-Specific Baking Paint Treatment (Resistant To Sunlight And Rain)



(3D Render-Exploded View)



(3D Render-Assembly View)

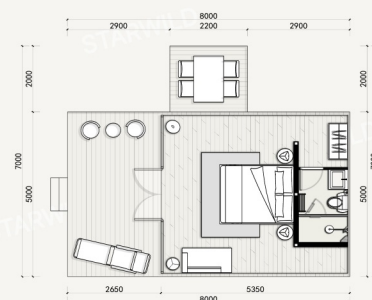


(Floor Plan)

## INTERIOR SPACE DIAGRAM



Side Canopy



Frame




Tube



Moisture-Proof Ground Cloth

## OPTIONAL ACCESSORIES



Decking System



Bathroom System




Interior System



Door/Window System



Curtain System



Insulation System