




Parameters	Configuration	Weight
Overall Dimension/ Area(m²)	Standard Version 6.0*7.0*6.0m / 42.0m ² 5.8*5.8*4.8m / 33.7m ²	Standard Version 728kg
	Mini Version 6.0*7.0*5.0m / 42.0m ² 5.8*5.8*4.8m / 33.7m ²	Mini Version 621kg
Volume	Wooden Carton Dimension	
Standard Version 2.15m ³	Mini Version 1.8m ³	Standard Version 390*80*70cm Mini Version 320*80*70cm

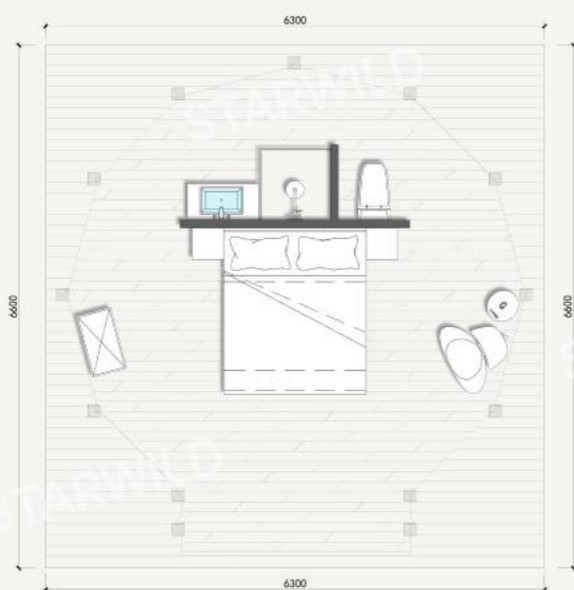


Outer Tent Parameters	Frame Parameters
380g Rubberized Waterproof Canvas Waterproof Pressure (3000 mm) UV Protection: UPF 40+ Flame Retardant: B2 Tear Resistance: Warp 2057N / Weft 944N	Standard Version Main Tube: Φ60mm Hot-Dip Galvanized Steel Pipe, 2.0mm Thickness; Connection Tube: Φ70mm Hot-Dip Galvanized Steel Pipe, 4.0mm Thickness Mini Version Main Tube: 48*2.0mm Hot-Dip Galvanized Steel Pipe TIG Welding (Tungsten Inert Gas Welding)/ Outdoor-Specific Baking Paint Finish

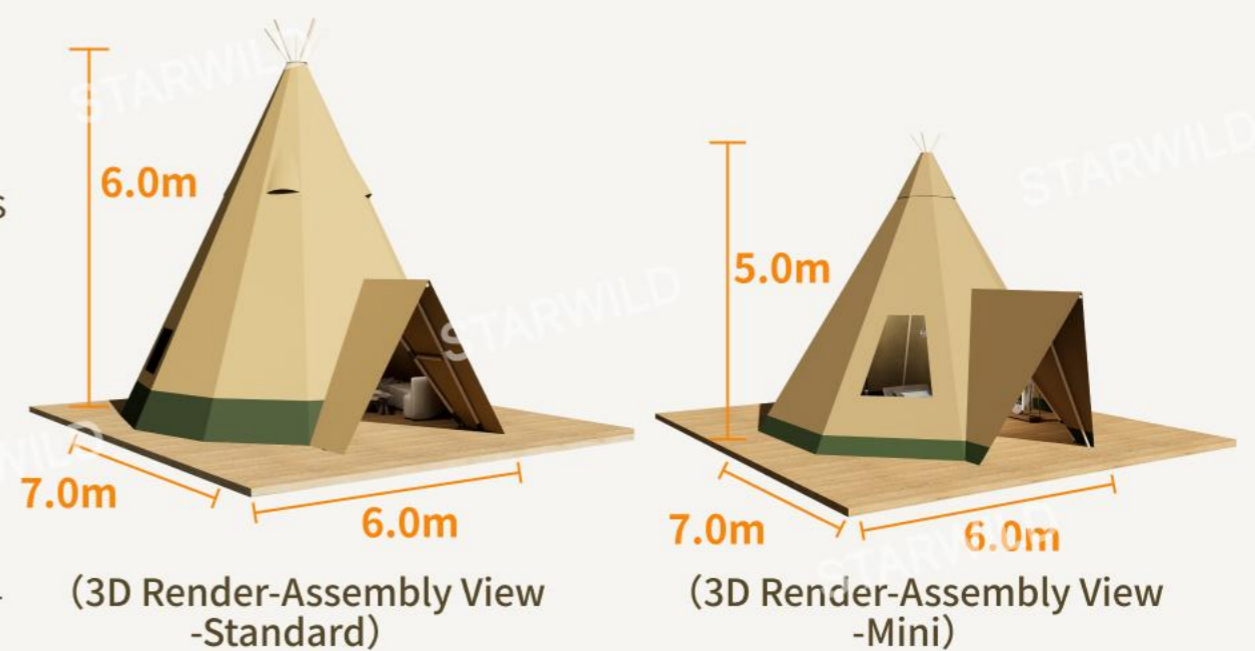

(Floor Plan-Standard)

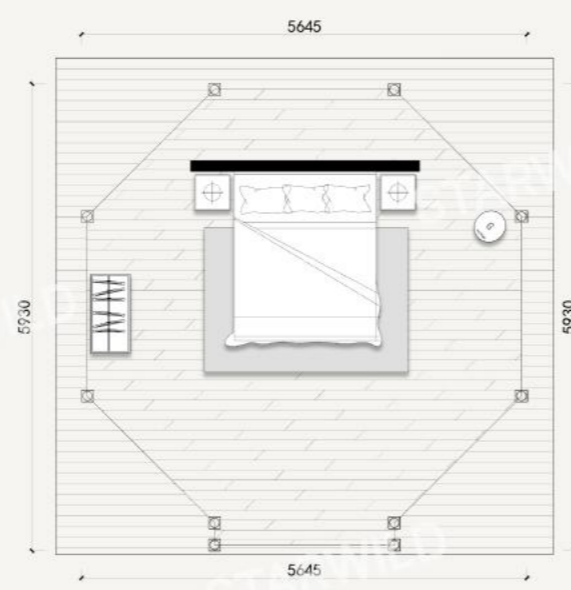

(Floor Plan-Mini)

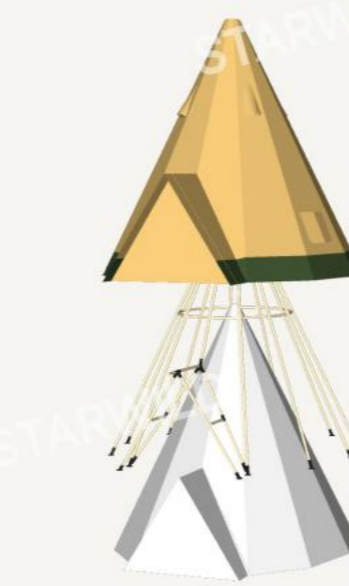

(3D Render-Exploded View -Standard)



(3D Render-Exploded View -Mini)

INTERIOR SPACE DIAGRAM



OPTIONAL ACCESSORIES



Mosquito Netting




Connection Tube



Vent Window



Moisture-Proof Ground Sheet

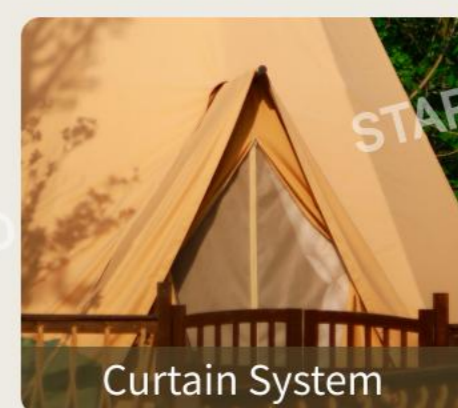

Curtain System



Insulation System