


Parameters	Configuration	Weight
Overall Dimension(m)/ Area(m²)	6.0*6.0*6.0m / 36.0m ²	720kg
	9.0*9.0*8.5m / 81.0m ²	/
	Option To Connect With Double/ Triple / Multi Configuration	
Volume	3.23m ³	
Wooden Carton Dimension	458*100*100cm	
Outer Tent Parameters	Frame Parameters	
900gPVDF Building Membrane Fabric	Main Tube: 80*80*2.0mm Hot-Dip	
Waterproof Pressure (19600 mm)	Galvanized Steel Pipe	
UV Protection: UPF 40+	Connection Tube: 60*2.0mm Hot Dip	
Flame Retardant: B2	Galvanized Steel Pipe	
Tear Resistance: Warp 3612N / Weft 2339N	TIG Welding (Tungsten Inert Gas Welding)	
Mildew Resistant、 Self-Cleaning	Hot-Dip Galvanized Corrosion-Resistant	



Optional Configuration Full-Height Glass Wall (Including Doors And Windows)

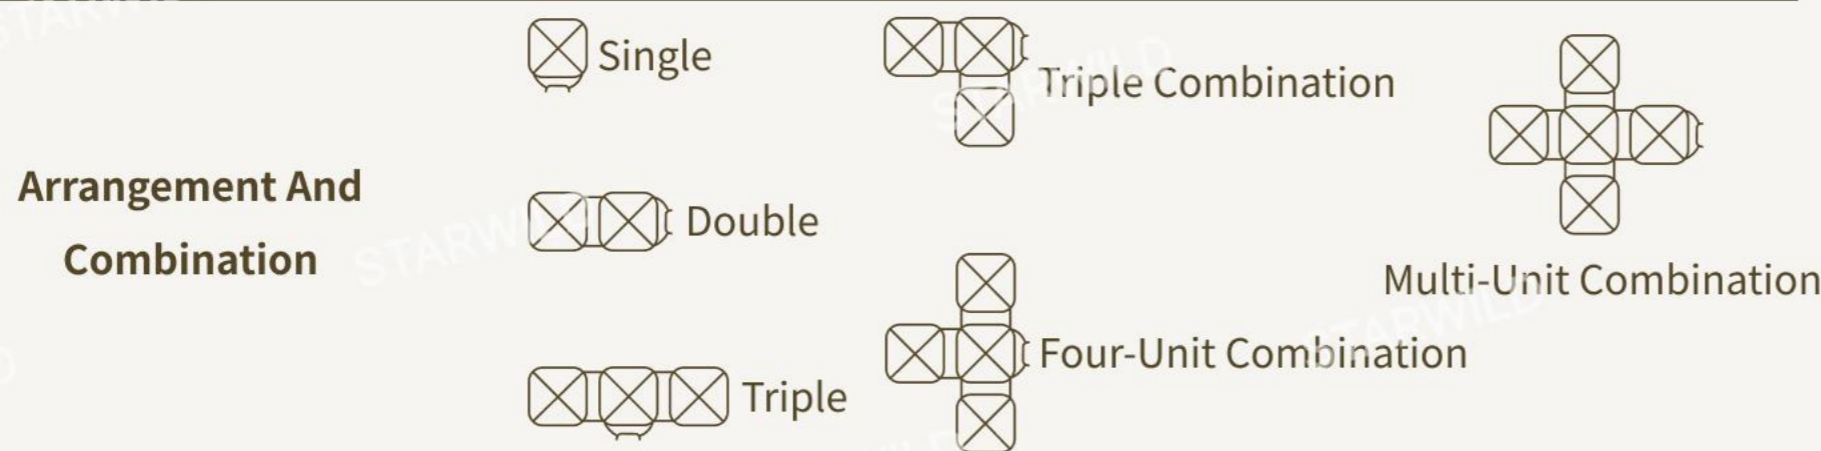





(3D Render-Exploded View)




(3D Render-Assembly View)

DETAILS DISPLAY

OPTIONAL ACCESSORIES

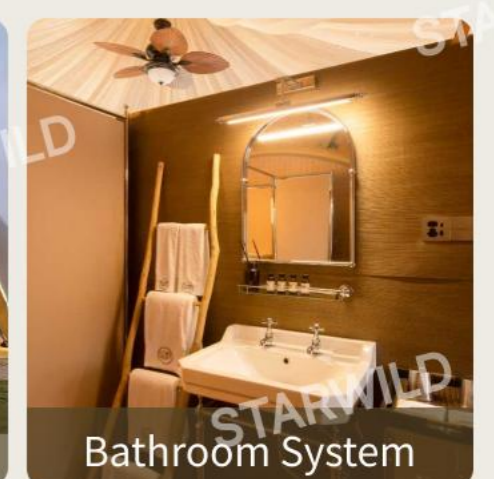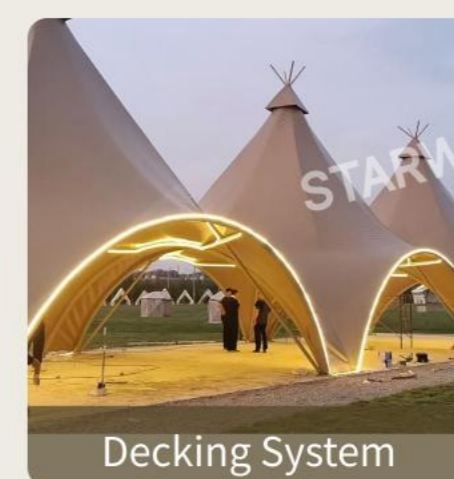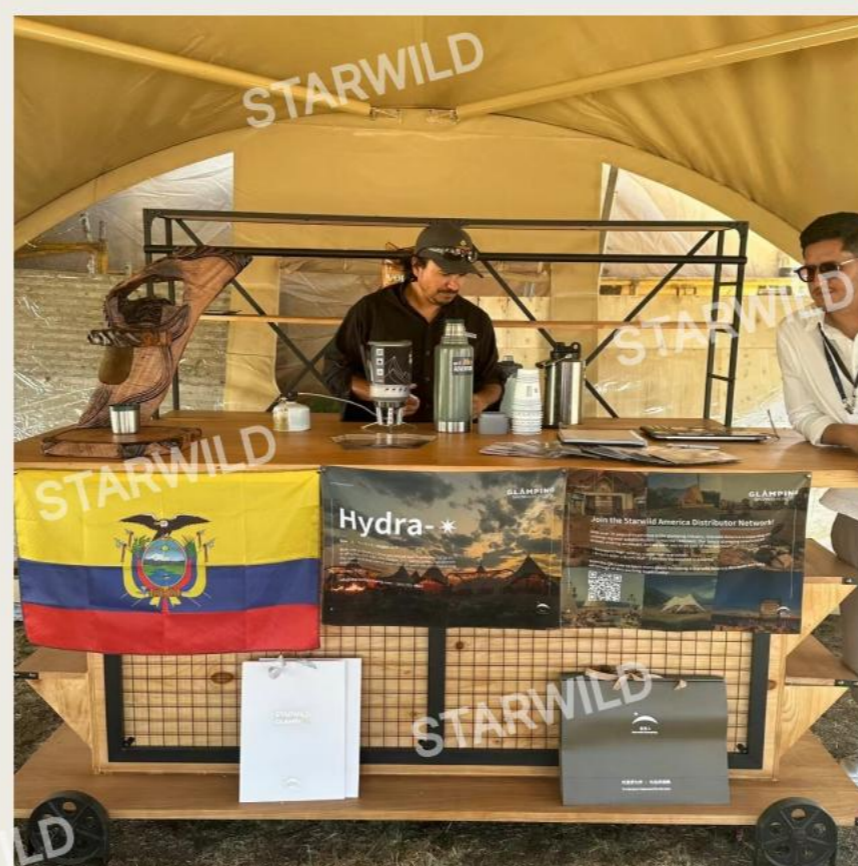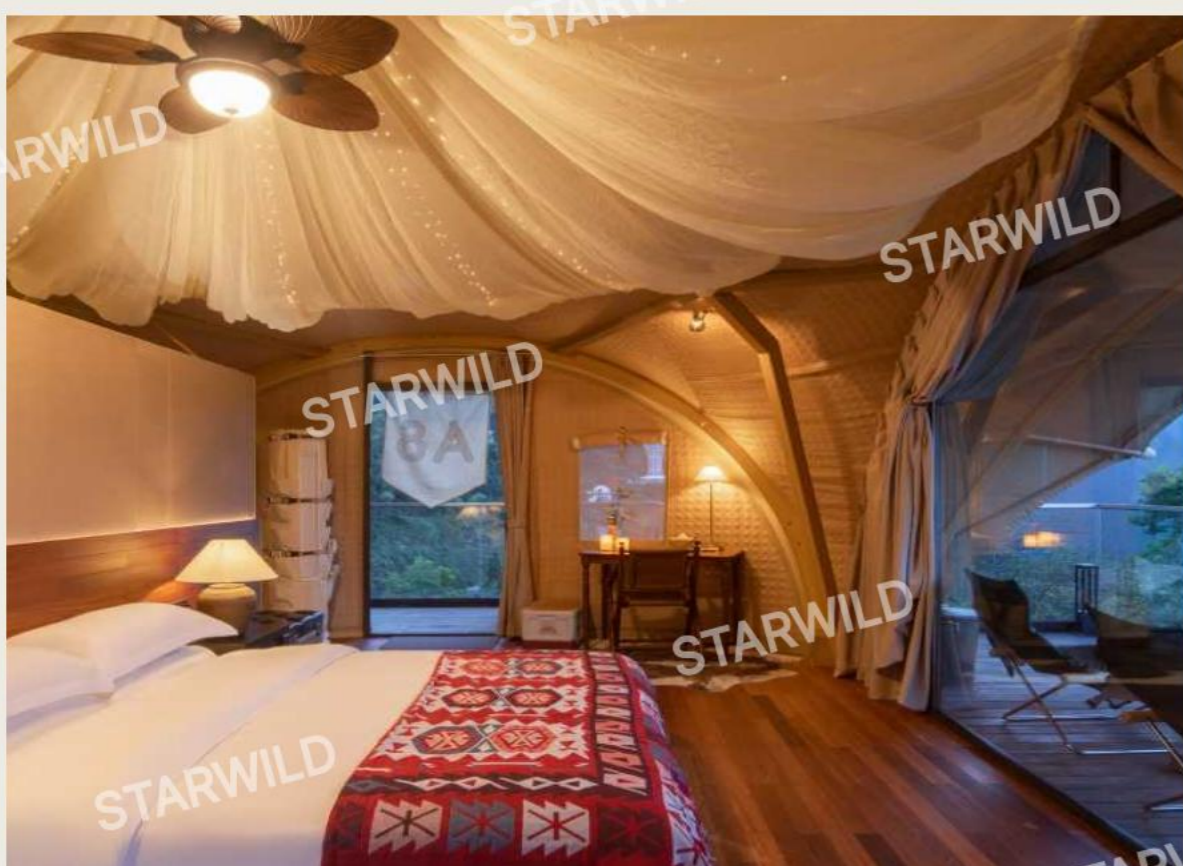

Connection Tube

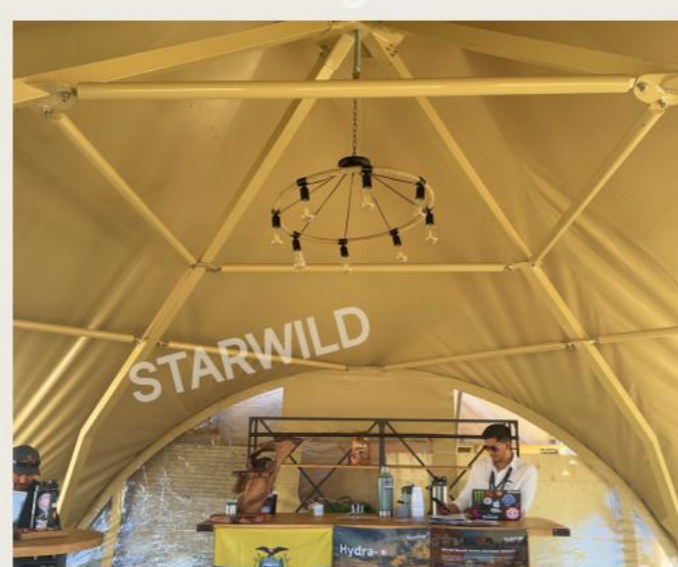

Frame



Connection Tube

