




Starwild Delphinus+

Embrace Natures' Embrace

Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²)	4.0*6.0*3.25m / 24m ² 3.5*3.5*3.05m / 12.25m ²	285kg	1.35m ³
	5.0*7.0*4.10m / 35m ² 4.5*4.5*3.80m / 20.25m ²	349kg	1.9m ³
Interior Dimension(m)/ Area(m ²)	5.0*9.0*4.10m / 45m ² 4.5*6.5*3.80m / 29.25m ²	384kg	2.0m ³
Wooden Carton Dimension	403*73*60cm / 505*54*100cm / 505*54*100cm		
Inner Tent Parameters	Oxford Cloth 600D Oxford Cloth Waterproof Pressure (2500 mm) UV Protection: UPF 40+ Flame Retardant: B2 Tear Resistance: Warp 1792N / Weft 923N Self-Cleaning	TC Cotton 430g TC Cotton Waterproof Pressure (1000 mm) UV Protection: UPF 50+ Tear Resistance: Warp 1874N / Weft 1298N Self-Cleaning	
Outer Tent Parameters	Oxford Cloth 600D Oxford Cloth Waterproof Pressure (2500 mm) UV Protection: UPF 40+ Flame Retardant: B2 Tear Resistance: Warp 1792N / Weft 923N Self-Cleaning	PVC Blackout Fabric 585g PVC Blackout Fabric Waterproof Pressure (30000 mm) UV Protection: UPF 40+ Flame Retardant: B1 Tear Resistance: Warp 2470N / Weft 2140N Mildew Resistant、Self-Cleaning	
Frame Parameters	Main Tube: Φ60mm Galvanized Steel Pipe, 2.0mm Thickness(Wood Color) Connection Tube: Φ70mm Galvanized Steel Pipe, 4.0mm Thickness(Wood Color) TIG Welding (Tungsten Inert Gas Welding) Outdoor-Specific Baking Paint Finish (Resistant To Sunlight And Rain)		

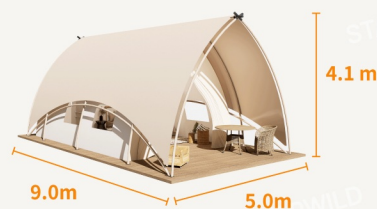

(3D Render-Assembly View)



(3D Render-Exploded View)



(Floor Plan)

INTERIOR SPACE DIAGRAM



Tear-Resistant
Reinforced Corners



Corner Ground Fixing



Connection Tube



Side Rain Curtains

OPTIONAL ACCESSORIES



Decking System




Bathroom System



Interior System



Door/Window System



Curtain System



Insulation System